

Item number: STP.22.176.10201/B

Revision: 00 • Date: 01 - 2023

Slider set for front axle

⌚ ~ 0.5 h.

EASY  DIFFICULT

ENGLISH • Thank you for choosing this premium product from SW-MOTECH. Visit our online shop for more information (e.g. model assignments). Required documents (e.g. general certification) are available there for you to download.

Please read and understand all the instructions, safety information and warnings in these mounting instructions before mounting and using the product in order to avoid injury and damage. Keep these mounting instructions for reference.

This product was developed for vehicles in factory condition. Compatibility with original accessories or accessories from other manufacturers cannot be guaranteed.

These mounting instructions have been prepared to the best of our current knowledge. No legal claims relating to accuracy can be made. Errors and omissions excepted. We reserve the right to make technical and design changes. The copyright is held by SW-MOTECH.

SAFETY WARNING SYMBOL

⚠ This warning symbol is used in these mounting instructions to warn of deadly dangers, injuries or other hazards. The words DANGER, WARNING or CAUTION are used as part of this warning symbol to convey important safety messages and information relating to the installation and use of this product. These words, together with the safety warning symbol, mean:

⚠ DANGER: Indicates a hazardous situation which, if not avoided, will result in death or serious injury!

⚠ WARNING: Indicates a hazardous situation which, if not avoided, may result in death or serious injury!

⚠ CAUTION: Indicates a hazardous situation which, if not avoided, may result in minor or moderate injury!

⚠ NOTE: Important information, but not relating to a risk of death or injury (property damage only)!

GENERAL INFORMATION

⚠ WARNING: Assembly and/or maintenance of this product requires advanced technical skills, appropriate tools and a good understanding of tool usage and torque specifications. For your own safety, SW-MOTECH recommends that assembly and/or maintenance is carried out by a qualified and certified two-wheeler workshop.

⚠ WARNING: If you decide to install this product yourself, read the installation instructions carefully and fully before installation and use, and follow all instructions to avoid serious or fatal injuries. Also observe all relevant information in the vehicle manual when mounting and using the product. **IF YOU DO NOT UNDERSTAND ANY PART OF THESE MOUNTING INSTRUCTIONS OR REQUIRE EXPLANATION OF ANY INSTRUCTION, DO NOT ATTEMPT TO INSTALL THIS PRODUCT WITHOUT ASKING SW-MOTECH FOR HELP!**

PREPARATION: Read the mounting instructions carefully and make sure that all parts on the parts list are available.

⚠ CAUTION: Ensure that your vehicle is standing securely. Switch off the engine and remove the ignition key. Allow the engine/exhaust to cool down, if necessary. Disconnect the battery when working on the electrics. Only use suitable tools, and always wear protective goggles and gloves during assembly and maintenance. Have a second person help you during assembly and maintenance.

ASSEMBLY: All parts and connections removed from the vehicle must be reinstalled according to the vehicle manufacturer's specifications or replaced with parts and hardware supplied by SW-MOTECH.

⚠ WARNING: Secure all threads with a medium-strength liquid threadlocker, unless otherwise specified.

⚠ DANGER: Tightening torques not defined by SW-MOTECH must be obtained from the vehicle manufacturer or a certified motorbike workshop.

FUNCTIONALITY CHECK: After assembly, make sure that no moving parts are obstructed and that the function of the vehicle is not impeded. Cables and hoses must not be chafed and/or pinched.

⚠ WARNING: Carry out a comprehensive functionality check before you start to drive. Check the tightening torque of all connections and the tight fit of the product after the first 50 km and then at regular intervals. Mounted accessories can change the handling and stability of the vehicle.



SW-MOTECH GmbH & Co. KG
Ernteweg 7-10
35282 Rauschenberg
Germany



✉ info@sw-motech.com
🌐 www.sw-motech.com



Take note of the symbols and what they mean in the ASSEMBLY section. If the term OEM appears in the ASSEMBLY section, the vehicle manufacturer's specifications must be observed and applied.



If you have any questions, please don't hesitate to contact our Customer Service team or our distributors. You can find our telephone number and a list of our distributors in our online shop:

www.sw-motech.com



Use thread locker: Indicates that a thread must be coated with liquid thread locker. H (HIGH): high strength; M (MEDIUM): medium strength; L (LOW): low strength.




Tighten/note the tightening torque information:

Indicates the tightening torque of a part specified by SW-MOTECH or the vehicle manufacturer (OEM).


PARTS LIST • READ AND KEEP MOUNTING INSTRUCTIONS!

1

1



355mm
GST.ST.08.355.45.088

 1/1

2



H: 28mm
STP.00.176.031

 1/1

3



H: 22mm
STP.00.176.030

 1/1

4



M8; DIN 439
MU.ST.08.45.439.04

 2/2

2


5




STP.00.176.004/B

 2/2

6



Ø 19 / Ø 15.2 / h 4.4
DB.AL.0190.0152.0044.02

 2/2

7



Ø 8.4; DIN 9021
US.ST.084.02.9021

 2/2

8



M8; DIN 985
MU.A4.08.01.985.70

 2/2

3


9




STP.00.176.005/B


 2/2

10



STP.00.176.006.01

 2/2

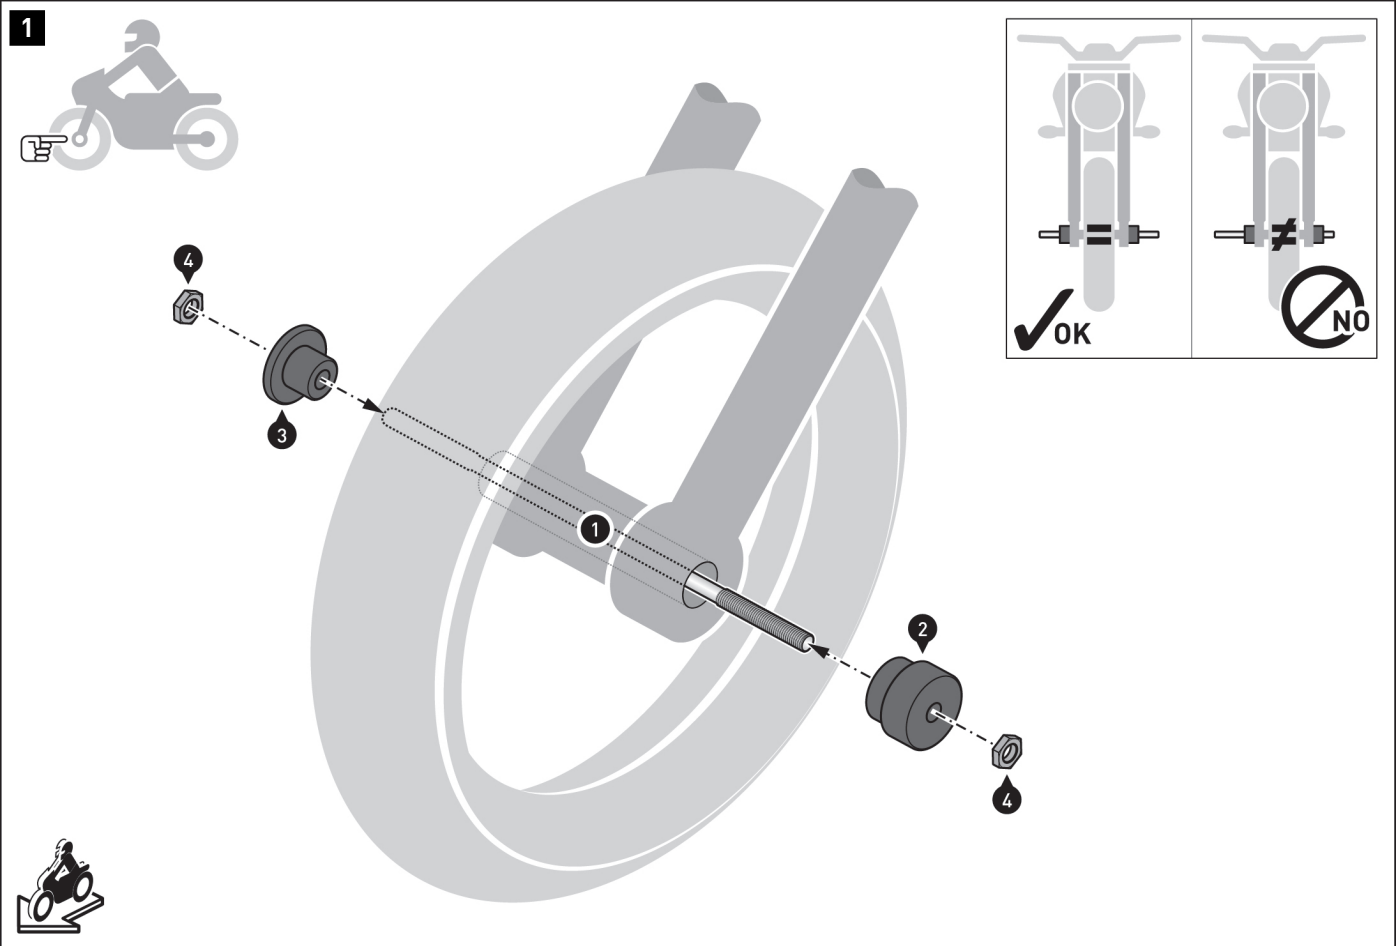

⚠ **WARNING:** Always wear eye and hand protection!

⚠ **WARNING:** Always use the proper tools!

⚠ **NOTE:** The vehicle is used as an example.



Guide the threaded rod (1) through the front axle mount of your vehicle.
Now push the bushings (2) and (3) onto the threaded rod (1).

⚠ **WARNING:** Ensure the threaded rod (1) is properly aligned in the center!






Then mount the components indicated on to the vehicle using the nuts (4).

⚠ **WARNING:** Use a liquid threadlocker!


Tighten the nuts (4) as specified.



M 18 Nm




2



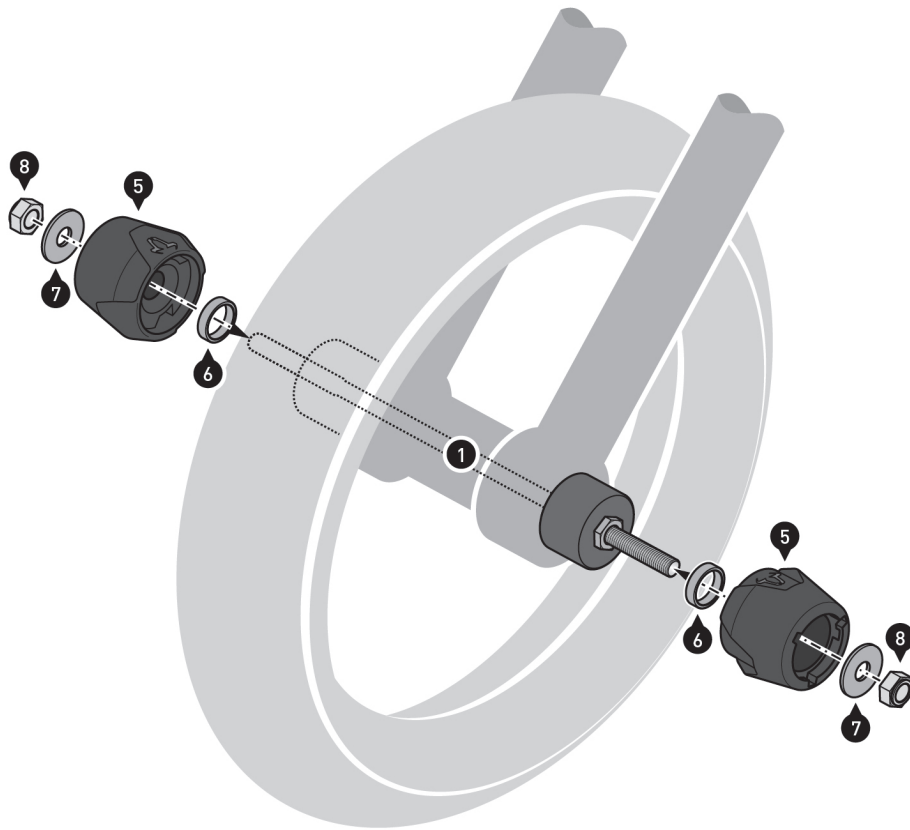


⚠ NOTE: The vehicle and mounted bushings are provided as examples.



Mount the crash pads (5) using the nuts (8) on to both sides of the threaded rod (1).
Tighten the nuts (8) as specified in the instructions.



18 Nm




3

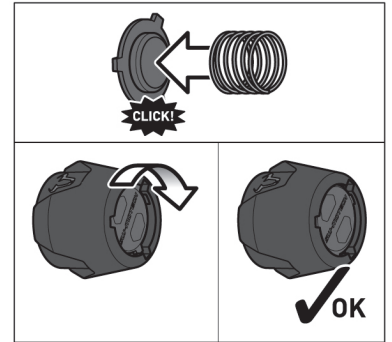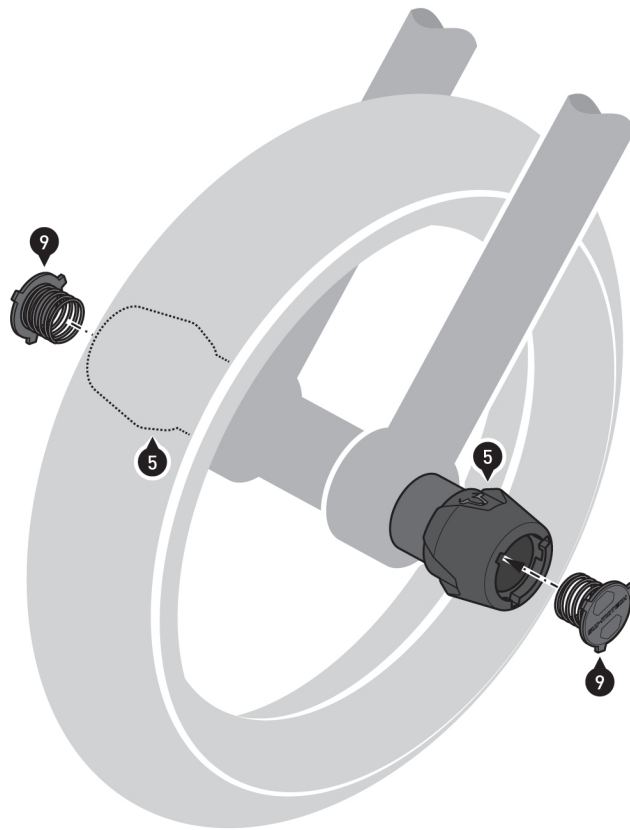

⚠ NOTE: The vehicle and mounted bushings are provided as examples.

Insert the cover caps (9) into the openings of the mounted crash pads (5) on both sides and turn them to the end position.

⚠ WARNING: Make sure that the cover caps (9) are firmly in place!



PRODUCT-SPECIFIC NOTES

⚠ NOTE: *Observe the country-specific regulations for the registration/operation of your vehicle or applicable TÜV regulations. After assembly, have parts that are subject to registration entered in the vehicle documents by your test centre.*